
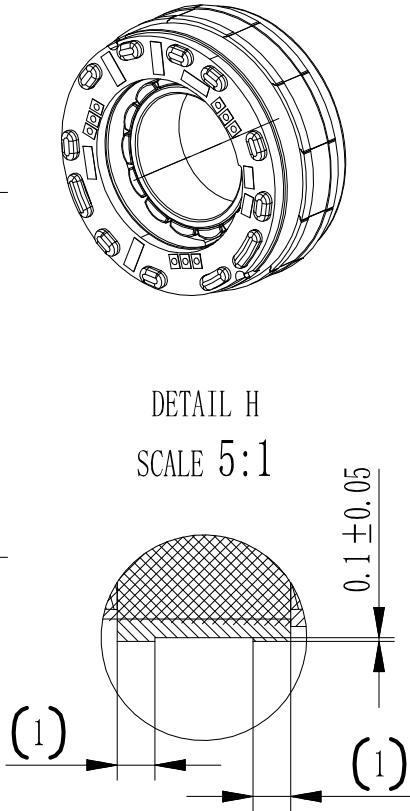
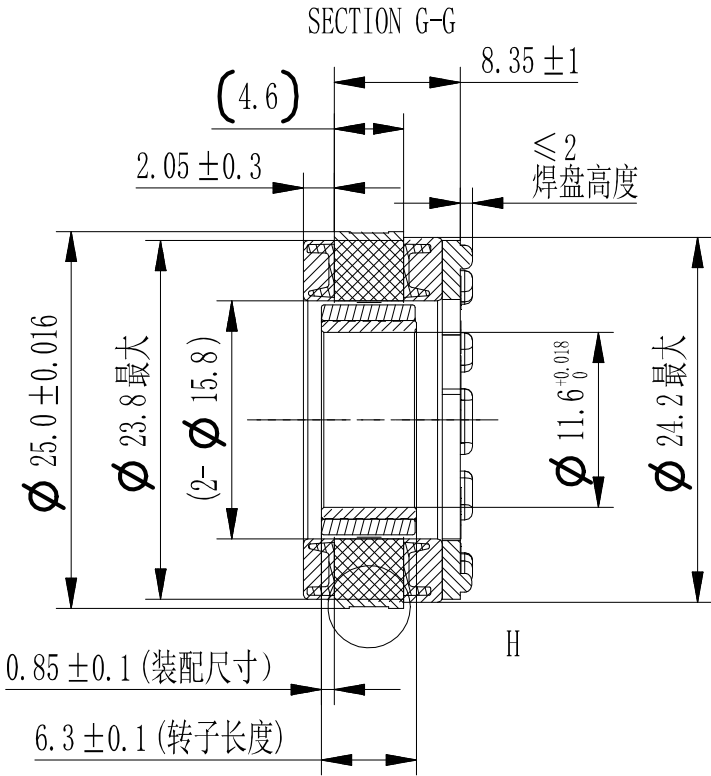


REV	DATE	DESCRIPTION	BY
00	20250617	初次发放	刘进

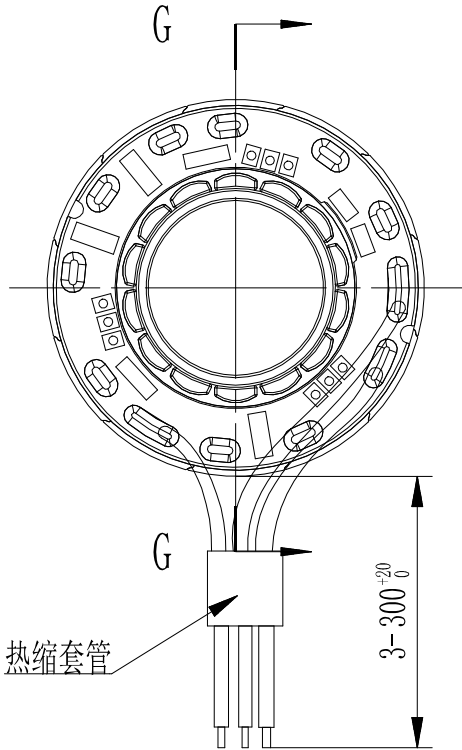

- 技术要求:
- 列表内峰值力矩基于常温下电机稳态测试;
 - 列表内电机性能参数基于鼎智公司开环驱动。

额定电压	VDC	24	介电强度	600V 50Hz 1s 3mA
额定转矩	N·m	0.032	绝缘电阻	50MΩhm 20℃
额定转速	RPM	22650最大	安装方式	-
额定电流	A	3.8±10%	工作制	S2
峰值功率	W	70	冷却方式	IC410
峰值转矩	N·m	0.105	防护等级	IP00
极对数	-	7	绝缘等级	F
电机重量	g	16(参考)	转子惯量	0.00147 kgcm ² (ref)

客 户		电机线				THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERE TO AND CUSTOMERS THEREOF, RECEIPT OR POSSESSION THEREOF DOES NOT COVER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING, THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.																	
<div>U</div> <div>V</div> <div>W</div> <div></div>	UL1332	20AWG	绕组 U			黄	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW				DRWN	刘进	DATE	20250617	DINGS'鼎智								
			绕组 V			红	LINEAR				ANGULAR				APRV		DATE		25ZWC10X-1_0_0-00WX	SIZE	A4		
			绕组 W			黑	0 - 3	±0.2	0 - 10	±1.5°													
							3 - 6	±0.5	10 - 50	±1°													
6 - 30	±1	50 - 120		±0.5°																			
				30 - 120	±2	120 - 400	±0.25°					SCALE	1:1										