


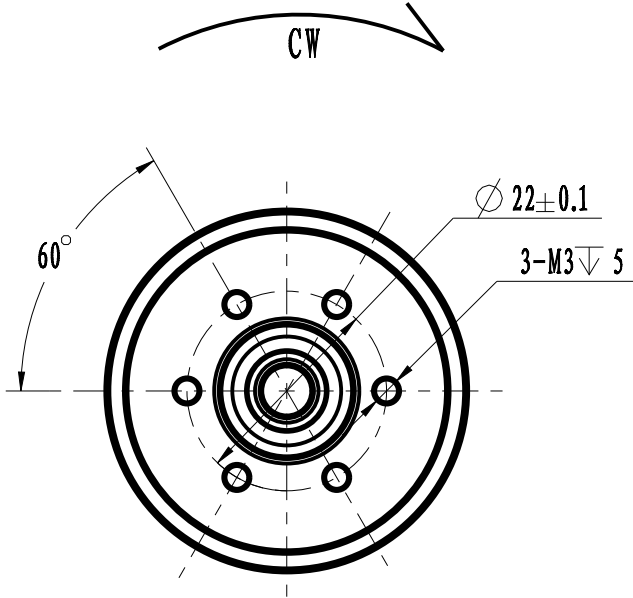
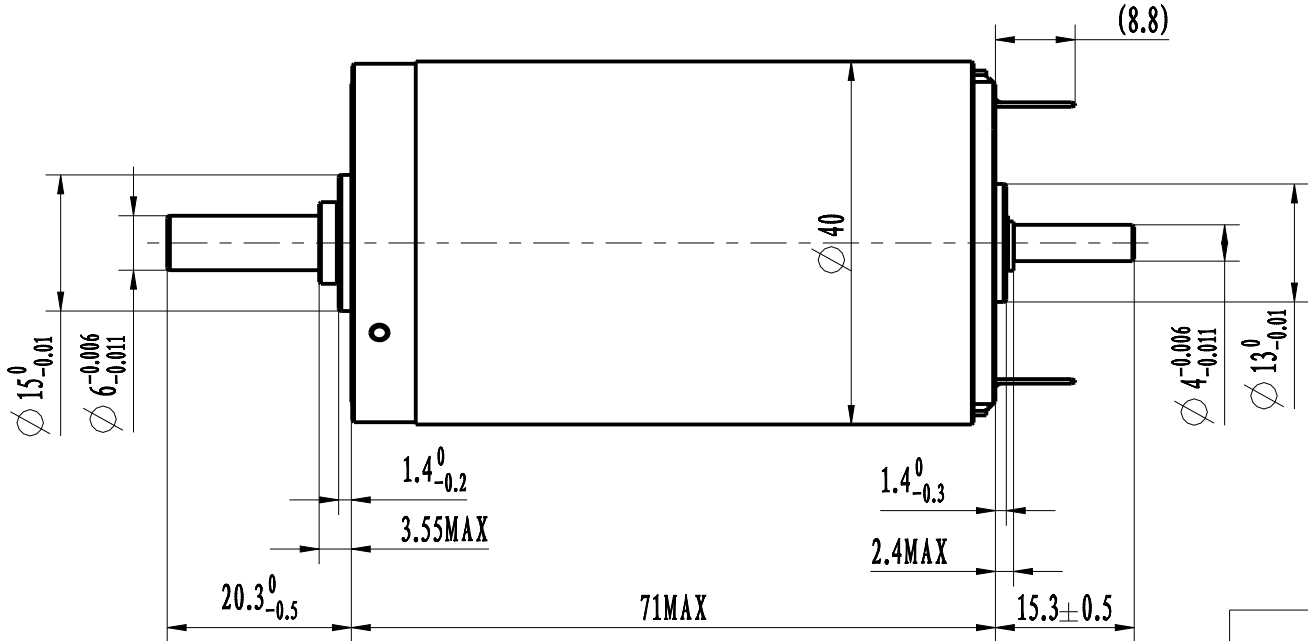


1	2	3	4	5	6	7	8	9	10						
A								变更履历			A				
								修订	日期	描述		批准			
B												B			
C												C			
D												D			
E												E			
F											F				
G	CUSTOMER		Line color line sequence		NOTICE TO PERSONS RECEIVING THIS DRAWING THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERE TO AND CUSTOMERS THERE OF, RECEIPT OR POSSESSION THERE OF DOES NOT CONFERTO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.							G			
	WIRING CHART														
H					UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW		DRAWN		DATE		SIZEA3SHEET1/1				
					LINERANGULAR		CHECK		DATE						
					0~3	±0.2	0~10	±1.5°	APPRVD					DATE	
					3~6	±0.5	10~50	±1°	COUNTERSIGN					DATE	
						6~30	±0.8	50~120	±30'	MODEL	40ZYCC71-1		SCALE	3:1	SHEET & RTC-WM-REVISION
	30~120	±1.5	120~400	±15'											

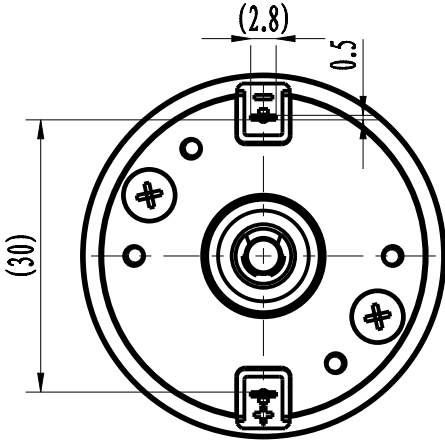

PARAMETERS OF MOTOR @25℃		
SUPPLY VOLTAGE	48	V/DC
ROTATION(VIEWED FROM SHAFT END)	CW	
NO-LOAD SPEED	6500±12%	RPM
NO-LOAD CURRENT	<0.16	A
MAX CONTINUOUS SPEED	5700±12%	RPM
MAX CONTINUOUS CURRENT	4.0	A
MAX CONTINUOUS TORQUE	186	mN.m
POWER	111	W
INSULATION RESISTANCE	1000/250V	MΩ
DIELECTRIC STRENGTH	500V AC/50HZ/5mA/1S	